





01
03
05
07
09
11

13 MIPC1000-80T
15 MPS10020KT-C
17 MPS20020KT-C
19 MIPC1000-100
21 MIPC1000-100C2
23 MIPC1000-160L
25 MIPC1000-135C1

27 CU
28 CU
29 P C




240 kW





() ()

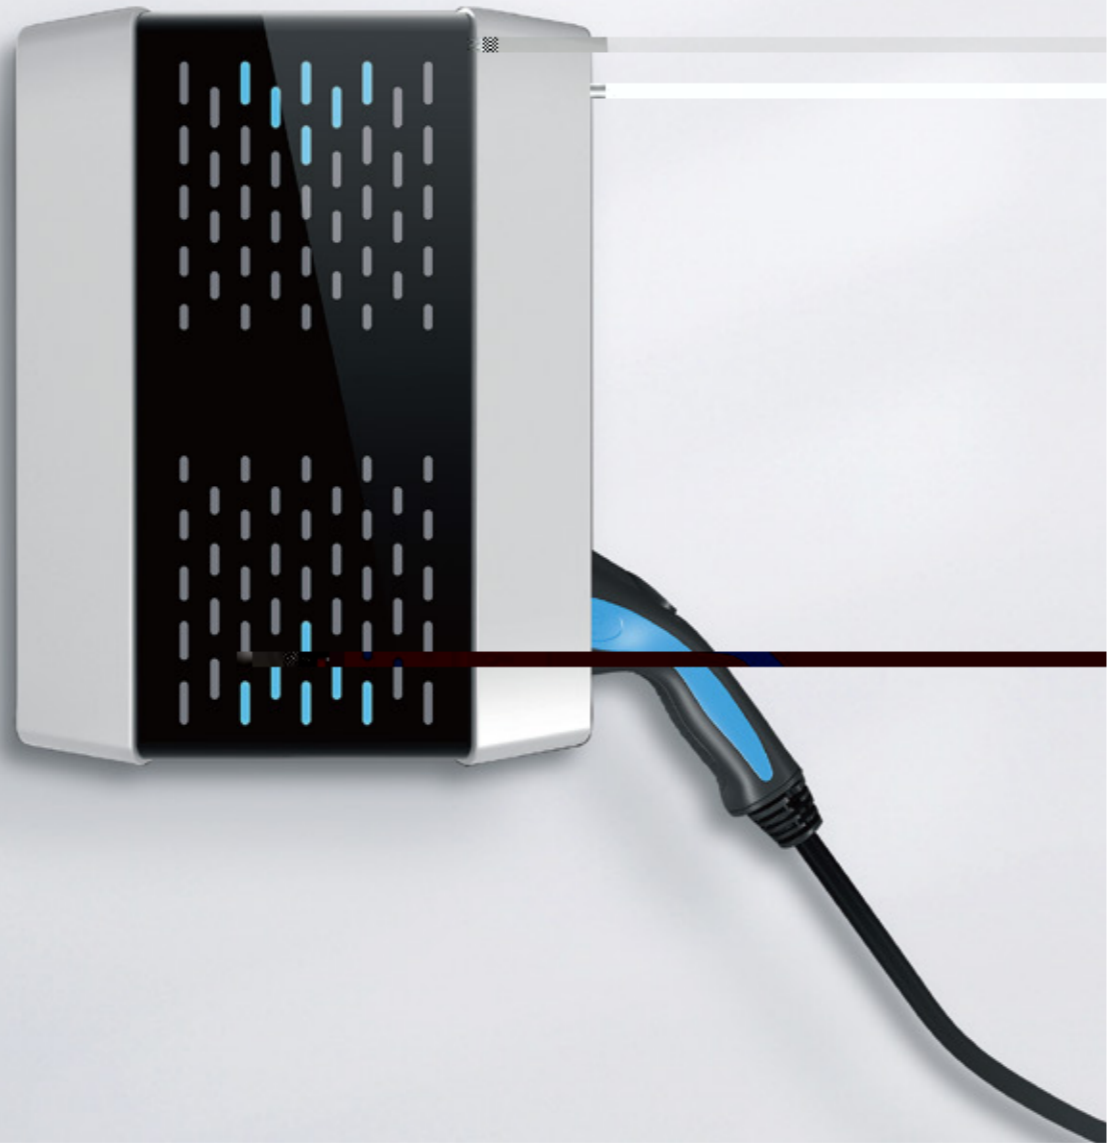


IP54




/



OTA





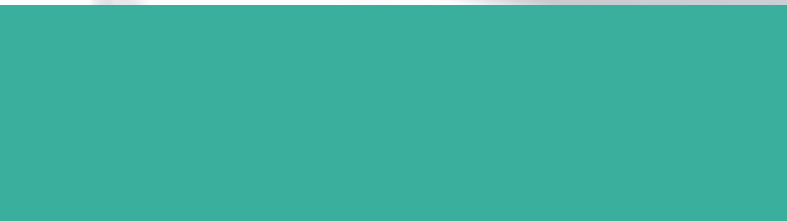

()

()

--
--
--

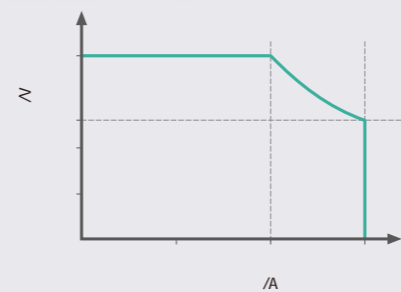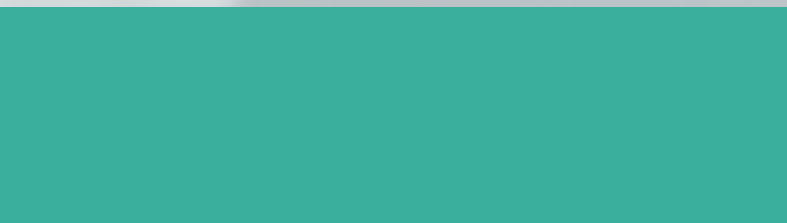


()

()

()

MIPC1000-100

MIPC1000-100G CE
MIPC1000-100G 1 UL

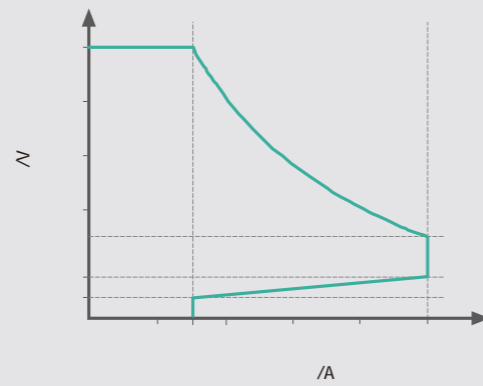

()

()



⋮

∇

()

30 kW

MIPC1000-100C2

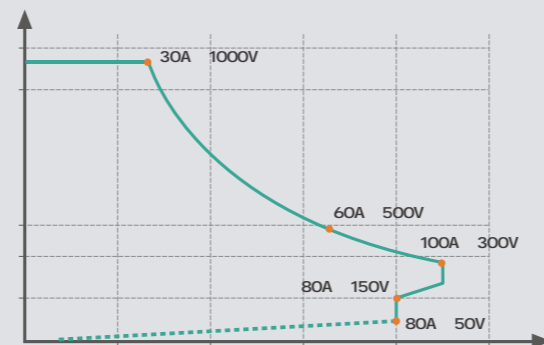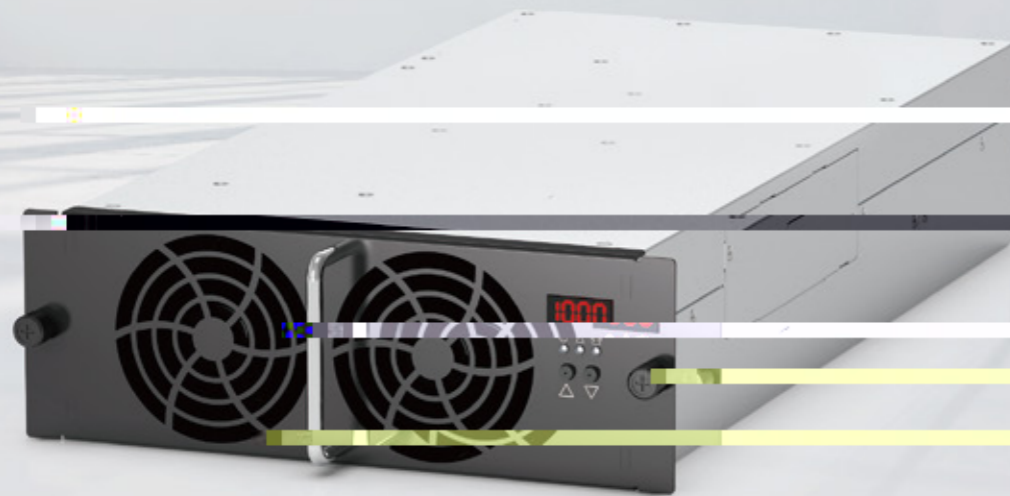

Technical Specifications	
Power	30 kW
Model	MIPC1000-100C2
Output Voltage	1000V
Output Current	30A
Efficiency	> 90%
Dimensions	1000mm x 1000mm x 100mm
Weight	10kg
Input Voltage	380V
Input Current	80A
Frequency	50/60Hz
Protection	Overvoltage, Overcurrent, Overtemperature
Control	Remote Control, Analog
Applications	Industrial, Laboratory, Research




40 kW

MIPC1000-135C1



(CCU)

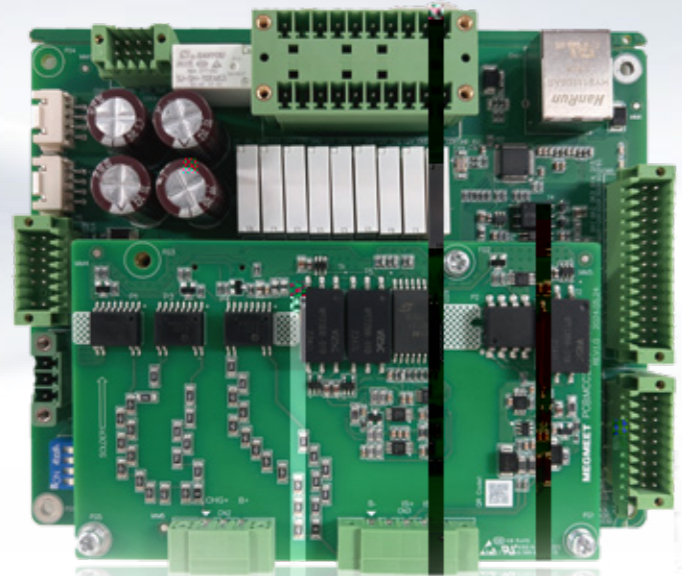


CCU

BMS



-
- 2 DO
- 15 DI
- 1 PWM
- 2
- 3 AN
- 1
- 1 RS485
- 1 RS232

(CU)

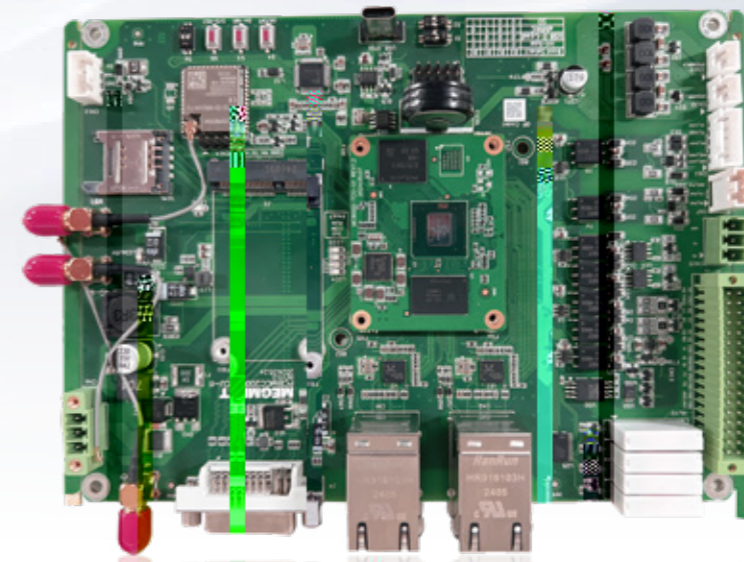

TCU

LVDS



POS M1 QR




4G WIFI



-
- 64 Cortex A53 , 1.8 GHz
- LPDDR4,
- 3 RS232
- 2
- 1 RS485
- 2 , 10 / 100 M
- 1 , 10 / 100 / 1000 M

(PLC

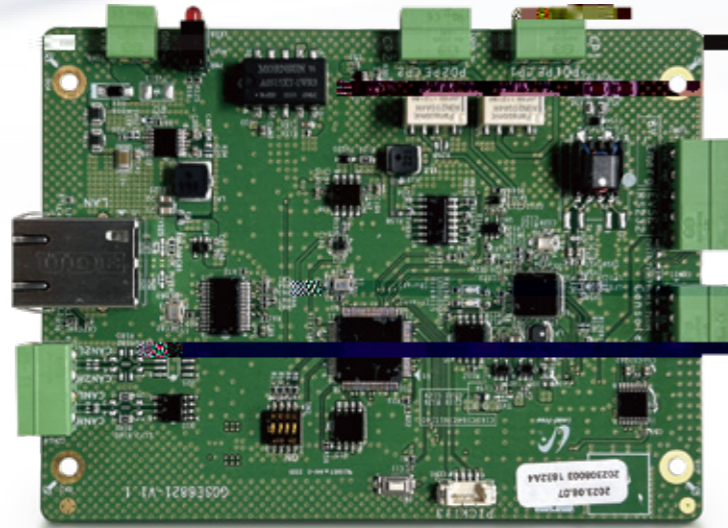

PLC

CCS

CCS, CHAdeMO()
 CCS DIN 70121, ISO15118
 CHAdeMO , 2.0 ()
 IEC 61851-2:2023
 ()

AN ,
 RS232 , ,
 Proxima Detection(PD)
 EIM, PnC

12 / 24 VDC
 9~26 VDC
 for CCS, Max. 40

119 x 229 (mm)
 -40 °C ~ +85 °C

R&D

>3000

1990

↑ 2024 400+

35%

32

• 9

38

• 28



CNAS TUV UL-WTDP UL-CTF



QDM

DEM

